




COMPRESSED AIR TREATMENT  
**REDEFINED**

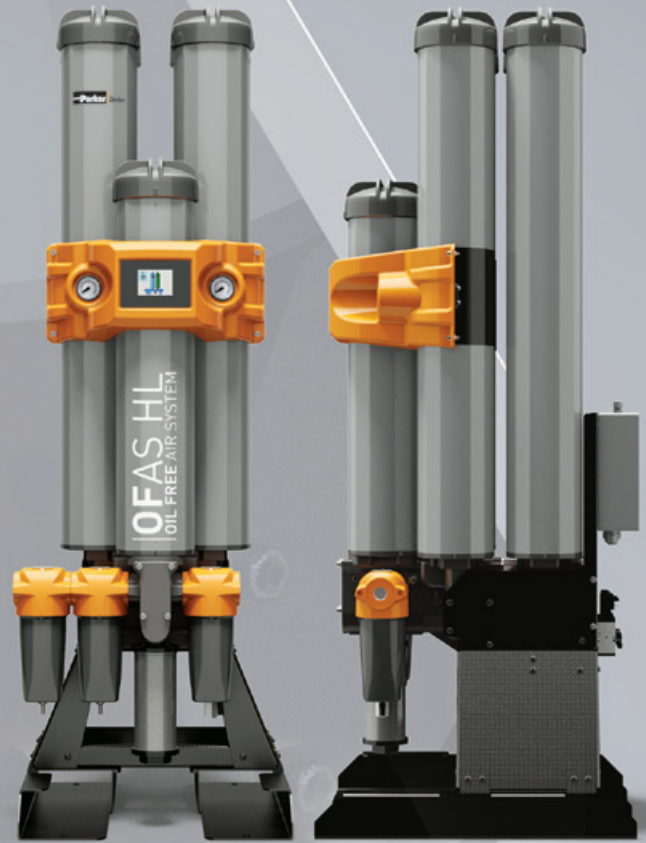

**Parker Zander Oil Free Air System.  
Innovative engineering and technology.**

Combining sophisticated OIL-X filtration technology with an optimised drying system, the OFAS is designed to deliver consistent high performance over an extended period. Air quality is third party validated to ISO 7183 and ISO 8573-1 and also offers class 0 for total oil. So you can be completely confident of your compressed air quality.

**OFAS HL**  
OIL FREE AIR SYSTEM

ISO 8573-1  
**CLASS 0 AIR**

The OFAS is third party validated by Lloyds register to provide ISO 8573-1 Class 0, with respect to total oil from both oil lubricated and oil free compressors, ensuring the highest quality air at the point of use for critical applications.

- › **Energy Saving Technology**  
Standard on all units, it automatically adapts dryer operation to the ambient inlet conditions and compressed air demand, ensuring optimum energy consumption and full utilisation of the desiccant material.
- › **HMI display screen**  
Large screen display offering a wealth of clear, useable, real-time information.
- › **High strength desiccant**  
Cartridges are snowstorm filled with high strength desiccant that has a 5-year lifetime, providing consistent drying, re-generation and dewpoint.
- › **Pre-mounted filters**  
New series OIL-X filters engineered to provide validated ISO 8573-1 performance.
- › **Threaded top end-cap**  
Threaded end-cap enables the straightforward replacement of the desiccant cartridge.
- › **Purge setting**  
The purge air can be set at minimum operating pressure easily, without the need for specialist tools.
- › **Corrosion protected column**  
With a 10-year guarantee, to ensure a long operational life.
- › **Full bore internal flow paths**  
Featuring optimised flow management for reduced pressure drop.
- › **Full bore cylinder valve system**  
Low pressure loss valves provide full air flow and minimal back pressure, whilst robust cylinders extend service intervals.
- › **Base plate**  
Designed for pallet trucks, allowing for easy, time-saving installation.

## Product Selection

OFAS	HL (Heatless)	050 055 060 065 070 075 080 085	G (BSPP) N (NPT)	16	E (EST)		
Series	Regeneration Type	Model	Dewpoint	Connections	Max Pressure	Power Supply	Controller
OFAS	HL	065	-40	G	16	A	E
			-40°C (ISO8573-1:2010 Classification (Standard), Class 2.2.0)			A (AC)* D (DC)*	
			-70°C (ISO8573-1:2010 Classification (Option 1), Class 2.1.0)				
			-20°C (ISO8573-1:2010 Classification (Option 2), Class 2.3.0)				

\* AC-85 - 265v 1ph 50/60Hz. DC-24v direct connection.

## Flow Rates

Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure.

Model	Port Connection BSPP or NPT	Inlet Flow Rate			
		L/s	m <sup>3</sup> /min	m <sup>3</sup> /hr	cfm
OFAS HL 50	½"	15	0.92	55	32
OFAS HL 55	½"	19	1.17	70	41
OFAS HL 60	½"	25	1.50	90	53
OFAS HL 65	½"	31	1.84	110	65
OFAS HL 70	¾"	42	2.51	150	88
OFAS HL 75	1"	51	3.09	185	109
OFAS HL 80	1"	61	3.67	220	129
OFAS HL 85	1 ½"	83	5.01	300	177

Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure. For flows at other pressures, apply the correction factors shown below.

## Product Selection & Correction Factors

For correct operation, compressed air dryers must be sized using for the minimum pressure, maximum temperature and maximum flow rate of the installation. To select a dryer, first calculate the MDC (Minimum Drying Capacity) using the formula below then select a dryer from the flow rate table above with a flow rate equal to or above the MDC. **Minimum Drying Capacity = System Flow x CFIT x CFAT x CFP x CFD**

### CFIT - Correction Factor Maximum Inlet Temperature

Maximum Inlet Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		1.00	1.00	1.00	1.04	1.14	1.37

### CFAT - Correction Factor Maximum Ambient Temperature

Maximum Ambient Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		1.00	1.00	1.00	1.04	1.14	1.37

## CFP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	4	5	6	7	8	9	10	11	12	13	14	15	16
	psi g	58	73	87	100	116	131	145	160	174	189	203	218	232
Correction Factor		1.60	1.33	1.14	1.00	0.89	0.80	0.73	0.67	0.62	0.57	0.53	0.50	0.47

## CFD - Correction Factor Dewpoint

Maximum Inlet Temperature	°C		-20		-40		-70
	°F		-4		-40		-100
Correction Factor			0.91		1		2.00

## Technical Data

Dryer Models	Min Operating Pressure		Max Operating Pressure		Min Operating Temperature		Max Operating Temperature		Max Ambient Temperature		Electrical Supply (standard)	Electrical Supply (optional)	Filter Thread Connections	Noise Level
	bar g	psi g	bar g	psi g	°C	°F	°C	°F	°C	°F				
OFAS HL 50-85	4	58	16	232	5	41	50	122	55	131	85 - 265V 1ph 50/60Hz	24V DC	BSPP or NPT	<75

## OIL-X Pre-Mounted Filters

Filtration Position	Inlet	Inlet	Outlet	Outlet
Filtration Grade	Grade AO	Grade AA	OVR	Grade AO
Filtration Type	Coalescing	Coalescing	Oil Vapour Removal	Dry Particulate
Particle Removal (inc water & oil aerosols)	Down to 1 micron	Down to 0.01 micron	N/A	Down to 1 micron
Maximum Remaining Oil Content at 21°C	0.5 mg/m <sup>3</sup> (0.5 ppm(w))	0.01 mg/m <sup>3</sup> (0.01 ppm(w))	0.003mg/m <sup>3</sup> at system temperature (0.003ppm(w)) at system temperature	N/A
Filtration Efficiency	99.925%	99.9999%	N/A	99.925%

## Weight & Dimensions

Model	Port Connection Inlet / Outlet	Dimensions						Weight		Inlet		Outlet
		Height (H)		Width (W)		Depth (D)				General Purpose Coalescing Filter	High Efficiency Coalescing Filter	General Purpose Dry Particulate Filter
		mm	ins	mm	ins	mm	ins	kg	lbs			
OFAS HL 50	½"	1133	45	559	22	512	20.2	90	198	AOP015C	AAP015C	AOP015C
OFAS HL 55	½"	1313	52	559	22	512	20.2	97	214	AOP015C	AAP015C	AOP015C
OFAS HL 60	½"	1510	59	559	22	496	19.5	106	234	AOP020C	AAP020C	AOP020C
OFAS HL 65	½"	1660	65	559	22	496	19.5	112	247	AOP020D	AAP020D	AOP020D
OFAS HL 70	½"	2020	80	559	22	496	19.5	132	291	AOP025D	AAP025D	AOP025D
OFAS HL 75	1"	1595	63	559	22	682	27	184	406	AOP025E	AAP025E	AOP025E
OFAS HL 80	1"	1745	69	559	22	682	27	196	432	AOP025E	AAP025E	AOP025E
OFAS HL 85	1½"	2105	83	559	22	682	27	232	511	AOP030G	AAP030G	AOP030G

## Pressure Vessel Approvals

Developed and Manufactured to DIN EN ISO 9001, DIN EN ISO 14001 and IP65.  
 Pressure vessel approved for fluid group 2 in accordance with the Pressure Equipment Directive 2014/68/EU and AS1210.  
 Approval to ASME VIII Div. 1 not required. For use with Compressed Air and Gaseous Nitrogen.

For more information please contact your local sales office or visit [www.parker.com/gsf](http://www.parker.com/gsf)

Parker has a continuous policy of product development and although the company reserves the right to changes specifications, it attempts to keep customers informed of any alterations.

# Parker Worldwide

## Europe, Middle East, Africa

**AE – United Arab Emirates,**  
Dubai

Tel: +971 4 8127100  
parker.me@parker.com

**AT – Austria,** Wiener Neustadt  
Tel: +43 (0)2622 23501-0  
parker.austria@parker.com

**AT – Eastern Europe,** Wiener  
Neustadt  
Tel: +43 (0)2622 23501 900  
parker.easteurope@parker.com

**AZ – Azerbaijan,** Baku  
Tel: +994 50 2233 458  
parker.azerbaijan@parker.com

**BE/LU – Belgium,** Nivelles  
Tel: +32 (0)67 280 900  
parker.belgium@parker.com

**BG – Bulgaria,** Sofia  
Tel: +359 2 980 1344  
parker.bulgaria@parker.com

**BY – Belarus,** Minsk  
Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**CH – Switzerland,** Etoy  
Tel: +41 (0)21 821 87 00  
parker.switzerland@parker.com

**CZ – Czech Republic,** Klecany  
Tel: +420 284 083 111  
parker.czechrepublic@parker.com

**DE – Germany,** Kaarst  
Tel: +49 (0)2131 4016 0  
parker.germany@parker.com

**DK – Denmark,** Ballerup  
Tel: +45 43 56 04 00  
parker.denmark@parker.com

**ES – Spain,** Madrid  
Tel: +34 902 330 001  
parker.spain@parker.com

**FI – Finland,** Vantaa  
Tel: +358 (0)20 753 2500  
parker.finland@parker.com

**FR – France,** Contamine s/Arve  
Tel: +33 (0)4 50 25 80 25  
parker.france@parker.com

**GR – Greece,** Athens  
Tel: +30 210 933 6450  
parker.greece@parker.com

**HU – Hungary,** Budaörs  
Tel: +36 23 885 470  
parker.hungary@parker.com

**IE – Ireland,** Dublin  
Tel: +353 (0)1 466 6370  
parker.ireland@parker.com

**IL – Israel**  
Tel: +39 02 45 19 21  
parker.israel@parker.com

**IT – Italy,** Corsico (MI)  
Tel: +39 02 45 19 21  
parker.italy@parker.com

**KZ – Kazakhstan,** Almaty  
Tel: +7 7273 561 000  
parker.easteurope@parker.com

**NL – The Netherlands,** Oldenzaal  
Tel: +31 (0)541 585 000  
parker.nl@parker.com

**NO – Norway,** Asker  
Tel: +47 66 75 34 00  
parker.norway@parker.com

**PL – Poland,** Warsaw  
Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**PT – Portugal**  
Tel: +351 22 999 7360  
parker.portugal@parker.com

**RO – Romania,** Bucharest  
Tel: +40 21 252 1382  
parker.romania@parker.com

**RU – Russia,** Moscow  
Tel: +7 495 645-2156  
parker.russia@parker.com

**SE – Sweden,** Spånga  
Tel: +46 (0)8 59 79 50 00  
parker.sweden@parker.com

**SK – Slovakia,** Banská Bystrica  
Tel: +421 484 162 252  
parker.slovakia@parker.com

**SL – Slovenia,** Novo Mesto  
Tel: +386 7 337 6650  
parker.slovenia@parker.com

**TR – Turkey,** Istanbul  
Tel: +90 216 4997081  
parker.turkey@parker.com

**UA – Ukraine,** Kiev  
Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**UK – United Kingdom,** Warwick  
Tel: +44 (0)1926 317 878  
parker.uk@parker.com

**ZA – South Africa,** Kempton Park  
Tel: +27 (0)11 961 0700  
parker.southafrica@parker.com

## North America

**CA – Canada,** Milton, Ontario  
Tel: +1 905 693 3000

**US – USA,** Cleveland  
Tel: +1 216 896 3000

## Asia Pacific

**AU – Australia,** Castle Hill  
Tel: +61 (0)2-9634 7777

**CN – China,** Shanghai  
Tel: +86 21 2899 5000

**HK – Hong Kong**  
Tel: +852 2428 8008

**IN – India,** Mumbai  
Tel: +91 22 6513 7081-85

**JP – Japan,** Tokyo  
Tel: +81 (0)3 6408 3901

**KR – South Korea,** Seoul  
Tel: +82 2 559 0400

**MY – Malaysia,** Shah Alam  
Tel: +60 3 7849 0800

**NZ – New Zealand,** Mt Wellington  
Tel: +64 9 574 1744

**SG – Singapore**  
Tel: +65 6887 6300

**TH – Thailand,** Bangkok  
Tel: +662 186 7000

**TW – Taiwan,** Taipei  
Tel: +886 2 2298 8987

## South America

**AR – Argentina,** Buenos Aires  
Tel: +54 3327 44 4129

**BR – Brazil,** Sao Jose dos Campos  
Tel: +55 800 727 5374

**CL – Chile,** Santiago  
Tel: +56 2 623 1216

**MX – Mexico,** Toluca  
Tel: +52 72 2275 4200

## European Product Information Centre

Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI,  
FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU,  
SE, SK, UK, ZA)

## Parker Hannifin Ltd.

Tachbrook Park Drive  
Tachbrook Park,  
Warwick, CV34 6TU  
United Kingdom  
Tel.: +44 (0) 1926 317 878  
Fax: +44 (0) 1926 317 855  
parker.uk@parker.com  
www.parker.com/gsf